



Sea-R.O., Inc. Watermakers Noryl non-metallic Centrifugal boost pumps

Noryl housing
and impeller

TEFC motor
3450 RPM

VITON seals
and o-rings

Vibration isolation
shock mounts



High output boost pump and motor assembly


Closed impeller design gives the highest pressure and flow.

Ideal for use with land based systems and with media filters for backwashing.

3450 RPM TEFC motor with 316 SS shaft provides ample boost pressure for optimum filter life.

Vibration isolation mounts to eliminate noise and elevate assembly.

Housing is easily removed for servicing without removing motor.

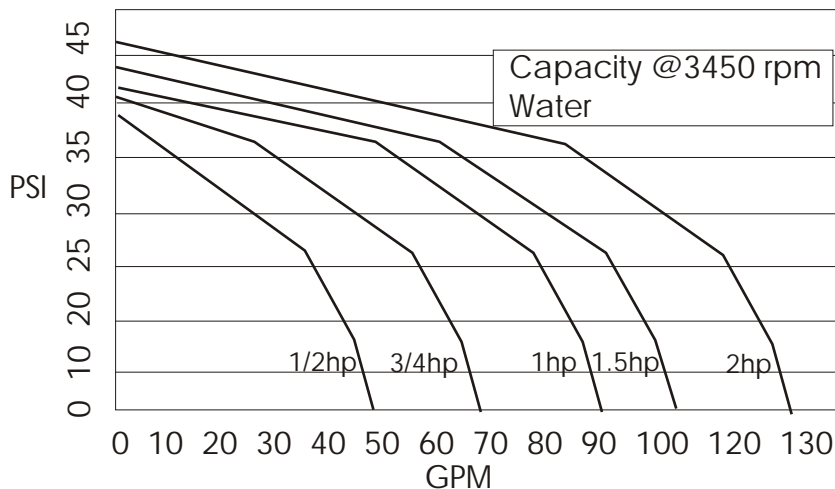

Horsepower/pricing/voltage

1/2hp	\$668.00	115/230/1
3/4hp	\$756.00	115/230/1
1.0hp	\$796.00	115/230/1
1.5hp	\$899.00	115/230/1
2.0hp	\$1075.00	115/230/1

Inlet/Outlet size. All FPT
1/2hp through 2hp are all
1.5" inlet/outlet